


Light Rotary Tiller

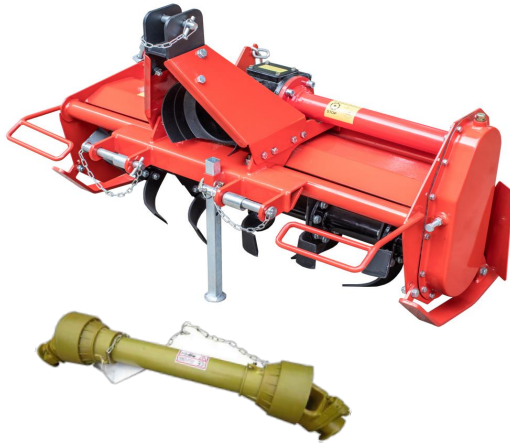

Application

- Small seedbed preparation
- Homeowner landscaping
- Small nurseries
- Gardens
- Small hobby farms
- Medium-duty residential use

Materials

Body: heavy Q-235 structural steel plate
 Gearbox: Nodular Iron, oil bath gearbox
 Blades: 60Si2Mn spring steel
 Fastener: 316 stainless steel
 Coating: Backed-on powder coat finish



Basic Data

Model	RT-85	RT-95	RT-105	RT-115	RT-125	RT-135
Tractor HP	15-25HP	15-25HP	15-25HP	15-35HP	15-35HP	15-35HP
Working Width	850mm	950mm	1050mm	1150mm	1250mm	1350mm
Tilling Depth	80-120mm					
Blades Qty.	16pcs	16pcs	20pcs	24pcs	28pcs	32pcs
PTO Input Speed	540r/min					
Weight	110kg	115kg	125kg	135kg	145kg	155kg
Structural size	950*550*560mm	1050*550*560mm	1150*550*560mm	1250*550*560mm	1350*550*560mm	1450*550*560mm
Packing Size	1050*650*660mm	1150*650*660mm	1250*650*660mm	1350*650*660mm	1450*650*660mm	1550*650*660mm

Key Features


1. Designed for subcompact 15~35HP tractors
2. Adjustable side skids for working depth control
3. Heavy-duty and high impact resistance
4. Cat I 3-Point 6-spline slip clutch driveline
5. Adjustable deflector level allows for various finish results
6. With transparent magic eye for oil verification
7. Right hand offset to cover tire track
8. Backed-on powder coat finish, anti-corrosion, anti-arrust, anti-static



Accessories



Blades

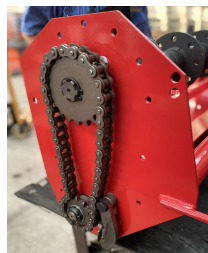

Chain-driven device